



EV8100

robustOS Pro

Elevator Voice Gateway

1 x FXS + 2 x Ethernet + 1 x RS232+ 1 x RS485 + 1x CAN

4 x DI, 1 x Relay, Optional Wi-Fi, Bluetooth



INTRODUCTION

Robustel's EV8100 is an advanced elevator voice gateway that supports voice transmission over VoIP and VoLTE, enabling seamless communication between a cellular network and the elevator's intercom system. This next-generation device offers multi-interfaces and allows for seamless remote monitoring and management of the elevator's communication system, making it easy to address any issues or malfunctions quickly and efficiently. With its advanced features and robust design, the EV8100 is a reliable and essential safety solution for any modern building.

EV8100 supports Docker for easy deployment of applications and benefits from 'RobustOS Pro' – Robustel's latest Linux Debian bullseye based router OS with enhanced cybersecurity, advanced GUI and a myriad of software features including VPNs, Smart Roaming, SMS remote control and more.

RCMS is Robustel's free router monitoring service that is fully compatible with the EV8100. It allows customers to see a location overview of their routers quickly and simply on a map. Features such as data usage, signal strength, current network and much more can then be viewed on a per router basis. Over-the-air updates are supported for Firmware, router configuration and Apps serving as essential "insurance" if anything was not quite right during deployment.


You can try Robustel's free router management platform by signing up here: <https://rcms-cloud.robustel.net>



KEY FEATURES

- VoIP and VoLTE supported, VoLTE as a backup voice communication line
- Battery holder for EN 81-28 and AS1735 compliance
- Highly stable 4G/3G/2G cellular connectivity with global band coverage
- High performance compute engine with 8 GB eMMC Flash for running complex customer applications
- 'Docker' containerization supported
- 1 x RS232 + 1 x RS485 + 1 x CAN for connection to industrial/legacy devices
- 4 x DI & 1 x Relay for simple monitoring and control
- Dual SIM card slots for redundant communications
- 802.11ac Wi-Fi (optional) supporting AP and Client modes
- Bluetooth (optional), Bluetooth 5.2 compliant
- Supports C, C++, Java, Python, Node.js etc. for users to develop their own applications
- More than 50,000 applications from Debian repository currently available
- IPsec/OpenVPN/GRE/L2TP/PPTP/DMVPN/Wireguard* + more VPN options
- Supports RCMS – Robustel's router/gateway management platform for effective management of large estates of devices

APPLICATION EXAMPLE

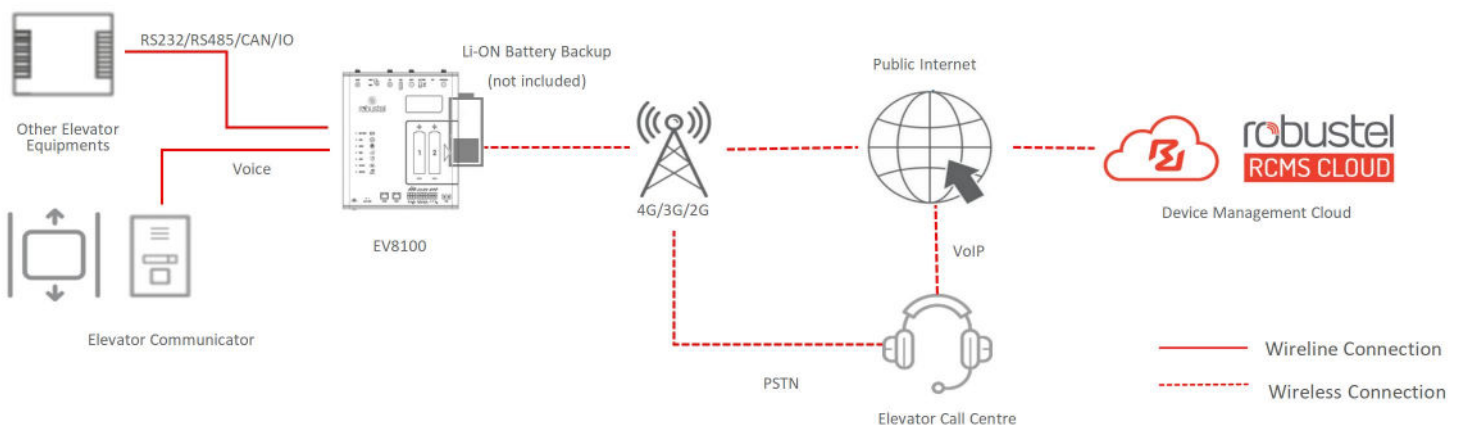

SPECIFICATIONS

Hardware System

CPU	ARM Cortex-A7, 792MHz
RAM	512MB DDR3
Flash	8 GB eMMC

Cellular Interface

Number of antennas	2
Connector	SMA-K
SIM	2 x Mini SIM (2FF)

FXS Interface

Number of ports	1
Connector	2-pin 5.08 mm terminal block
Signal	TIP, RING

Ethernet Interface

Ports	2 x RJ45, 10/100 Mbps, LAN or WAN, 1KV magnet isolation protection
-------	--

Serial Interface

Type	1 x RS232 + 1 x RS485 + 1 x CAN
Connector	3.5 mm terminal block
ESD protection	8 KV Air, 4 KV Contact
Baud rate	300 bps to 115200 bps for RS232/RS485, up to 1Mbps for CAN
Signal	RS232: TXD, RXD, GND; RS485: A, B, GND; CAN: CAN_H, CAN_L, GND

DI/Relay Interface

Number of ports	4 x DI(Wet contact) + 1 x Relay(Dry contact)
Connector	3.5 mm terminal block
Absolute maximum	+ 30V DC(DI), + 40VDC(Relay)
Absolute maximum	100 mA(DI), 300mA(Relay)
Signal definition	DI1+, DI1-, DI2+, DI2-, DI3+, DI3-, DI4+, DI4-, NC, NO, COM

Wi-Fi Interface (Optional)

Number of antennas	2
Connector	RP- SMA-K
Standards	802.11 a/b/g/n/ac, 2 x 2 MIMO, supports AP and Client modes
Frequency bands	2.4 GHz/ 5 GHz

Bluetooth Interface (Optional)

Number of antennas	1 (Multiplexing Wi-Fi antenna)
Connector	RP-SMA-K
Standards	Bluetooth 2.1 and 3.0 + Enhanced Data Rate (EDR) + Bluetooth 5.2

Others

Reset button	1 x RST
Switch	1 x Battery Switch
USB	1 x USB 2.0 (host), Type A, 5V, 500mA
LED indicators	1 x Battery, 1 x RUN, 1 x Line, 1 x MDM, 1 x RSSI, 1 x Cloud, 1 x Device
Watchdog	External

VoIP

Protocols	SIP (RFC3261) over UDP, SIPs, SRTP
DTMF	In-band, RFC2976, RFC 2833

Battery

1. Battery holder for 2 x 18650 lithium batteries (not included by default).
2. Device is only compatible with 18650 (flat top) type of lithium batteries.
3. If using a single battery, install it in position 1.
4. Improper installation or use of incorrect batteries may damage the device and void warranty.

Software (Basic features of RobustOS Pro)(*In progress)

Network protocols	PPP, PPPoE, TCP, UDP, DHCP, ICMP, NAT, HTTP, DNS, NTP, SMTP, Telnet, HTTPs, ARP, VLAN, SSH2, DDNS, etc.
VPN tunnel	IPsec, OpenVPN, GRE, L2TP, PPTP, DMVPN, Wireguard*
Firewall	DMZ, anti-DoS, Filtering (IP/Domain name/MAC address), Port Mapping, Access Control
Remote management	Web, CLI, SMS
Serial port	Transparent, TCP Client/Server, UDP, Modbus RTU Gateway
Others	Smart Roaming v2*

SDK

Operating System	RobustOS Pro (Based on Debian 11(bullseye))
Supported programming language	C, C++, Python, Java, Node.js etc. (for users to develop own applications)
Debian repository available	
Flash available for SDK	6 GB
RAM available for SDK	256 MB

App Center(Available Apps for RobustOS Pro)

APP*	Language, RCMS
------	----------------

*Request on demand. For more Apps please visit www.robustel.com.

Power Supply and Consumption

Connector	2-pin 3.5 mm terminal block with lock
Input voltage	9 ~ 30V DC
Power consumption	Idle: 4W, Data link: 25W(peak)

Physical Characteristics

Ingress protection	IP30
Housing & Weight	Plastic, 470g
Dimensions	170 x 150 x 35 mm
Installations	Desktop, wall mounting and 35 mm DIN rail mounting Optional magnetic mounting
Operating temperature	-20 ~ + 60 °C(Without battery); 0 ~ + 45 °C(With battery) <i>Note: The battery can be charged at 0~35°C</i>
Storage temperature	-40 ~ + 85 °C(Without battery) -20 ~ + 35 °C(With battery for long term)
Relative humidity	5 ~ 95% RH

Regulatory and Type Approvals

Environmental	RoHS2.0
EMI	EN 55032 Conducted Emission class B EN 55032 Radiated Emission class B
EMS	EN 61000-4-2 (ESD) Level 2 EN 61000-4-3 (RS) Level 3 EN 61000-4-4 (EFT) Level 2 EN 61000-4-5 (Surge) Level 2 EN 61000-4-6 (CS) Level 2

ORDERING INFORMATION

Model	PN	Wi-Fi +BLE	Frequency Bands*	Country/Region	Certification (*In progress)
EV8100-A-4L-A06GL	B126001	-	4G: LTE FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28 LTE TDD: B38/B39/B40/B41 3G: UMTS: B1/B2/B4/B5/B6/B8/B19 2G: GSM: B2/B3/B5/B8	Global	CE, UKCA, FCC, IC, PTCRB, Verizon*, AT&T
EV8100-B-4L-A06GL	B126002	✓	4G: UMTS: B1/B2/B4/B5/B6/B8/B19 2G: GSM: B2/B3/B5/B8		CE, UKCA, FCC, IC, PTCRB, Verizon*, AT&T, NTC*
EV8100-A-4L-A34AU	B126003	-	4G: LTE FDD : B1/B2/B3/B4/B5/B7/B8/B28 LTE TDD : B40	ANZ	RCM
EV8100-B-4L-A34AU	B126004	✓	3G: WCDMA: B1/B2/B4/B5/B8 2G: GSM/EDGE:B2/B3/B5/B8		
EV8100-A-4L-A04JP	B126005	-	4G: LTE FDD : B1/B3/B8/B18/B19/B26 LTE TDD : B41	JP	JATE , TELEC
EV8100-B-4L-A04JP	B126006	✓	3G:B1/B6/B8/B19		
EV8100-A-4L-A12EU	B126013	-	4G: LTE FDD : B1/B3/B7/B8/B20/B28A LTE TDD : B38/B40/B41	EU	CE, UKCA
EV8100-B-4L-A12EU	B126014	✓	3G: WCDMA: B1/B8 2G: GSM/EDGE:B3/B8		

*For more information about frequency bands in different countries, please contact your Robustel sales representative.