



R1520 robustOS

Industrial Dual SIM Cellular VPN Router
Suitable for 2G, 3G, 4G networks



INTRODUCTION

The R1520 router from Robustel is a versatile 4G router with 5 x Ethernet ports and a range of advanced functions for IoT Applications. There are 2 core models in the R1520 family as follows:

R1520 (S) – This is the STANDARD version without GPS suitable for most light industrial and Enterprise applications

R1520 (V) – This is the VEHICLE version with E-mark and GPS. It is optimized for vehicle use but can be used for any application

The Linux based Operating System, **RobustOS**, has been developed entirely in-house which leads to a very high standard of technical support and infrequent firmware updates due to modular nature of the OS. Many unique software innovations are built on top of RobustOS, these include:

RobustVPN – highly flexible hosted VPN service so customers can easily enjoy a “fixed IP router”

Data-Guard – invaluable failsafe in case of a system failure and runaway data usage

Smart Reboot – SMS tool to push roaming SIMs from a non-working to working state

Sniffer – run a Wireshark trace directly on the router for invaluable diagnostic information.

RCMS is Robustel’s free router monitoring service that is fully compatible with the R1520. It allows customer to see a location overview of their routers quickly and simply on a map. Features such as data usage, signal strength, current network and much more can then be viewed on a per router basis. Over-the-air updates are supported for Firmware, router configuration and Apps serving as essential ‘insurance’ if anything was not quite right during deployment.

You can try Robustel’s free router management platform by signing up here:


<https://rcms-cloud.robustel.net>



KEY FEATURES

- Cost-effective & high performance 3G/4G router
- Rugged design with 9 to 36 VDC power
- “Global” 4G version available
- E-mark certification for in vehicle use
- Optically isolated digital IO
- 10-bit Analog interface for direct sensor connections
- Supports Dual SIMs & Wi-Fi/Ethernet as WAN
- Cellular keep-alive and fast failover
- Extensive range of software “apps” for enhanced functionality
- RobustVPN – hosted service providing a “fixed IP” router
- IPsec/OpenVPN/GRE/L2TP/PPTP/DMVPN supported
- Extensive global certifications

APPLICATION EXAMPLE

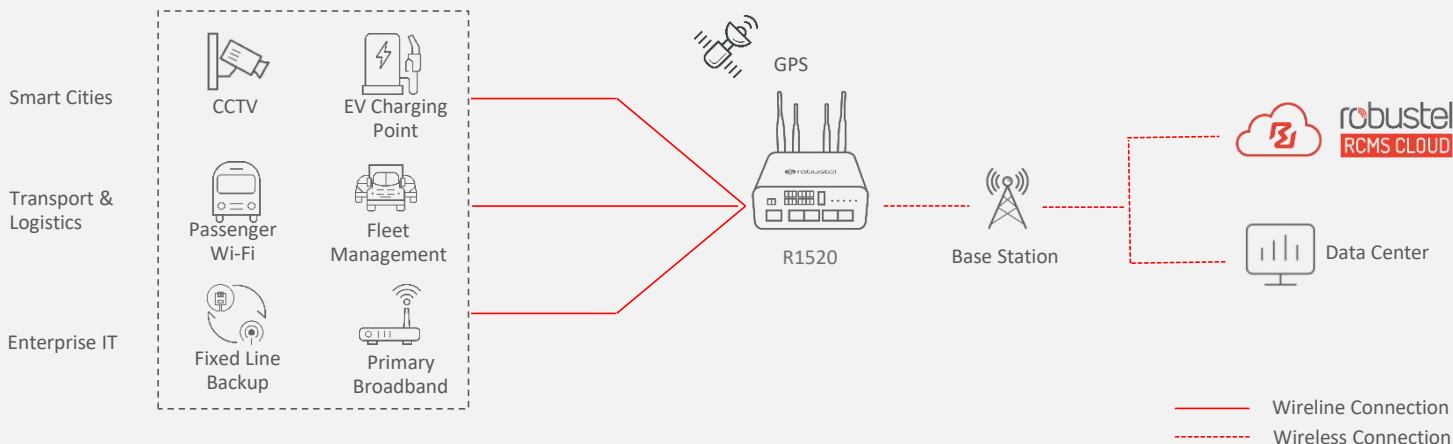

SPECIFICATIONS

Cellular Interface

| | |
|--------------------|-------------------|
| Number of antennas | 2 |
| Connector | SMA-K |
| SIM | 2 Mini SIM (2 FF) |

Ethernet Interface

| | |
|-----------------|---|
| Number of ports | 5 x 10/100 Mbps, 5 LAN by default, can be configured as 1 WAN + 4 LAN |
| WAN port | Support 802.3af & 802.3at PD feature on ETH0 (optional) |

| | |
|-----------------------------|--------|
| Magnet isolation protection | 1.5 KV |
|-----------------------------|--------|

Wi-Fi Interface

| | |
|--------------------|---|
| Number of antennas | 2 |
| Connector | RP-SMA-K |
| Standards | 802.11b/g/n, supports AP and Client modes |
| Frequency bands | 2.4 GHz |
| Security | WEP, WPA, WPA2 |
| Encryption | 64/128 AES, TKIP |
| Data speed | 2 x 2 MIMO, 300 Mbps |

DI/DO

| | |
|----------------------|-----------------------------------|
| Type | 1 x DI + 1 x DO, wet contact |
| Isolation | 3 KV |
| Socket form | 2 x 3-pin 3.5 mm female socket |
| Level | 3 ~ 30 VDC = HIGH, 0 ~ 1VDC = LOW |
| Absolute maximum VDC | 30 VDC (DI/DO) |
| Absolute maximum ADC | 10 mA (DI/DO) |

Analog Input

| | |
|---------------------|--|
| Type | 1 x AI (can be configured as voltage type or current type) |
| Voltage input range | 0 ~ 24 VDC |
| Current input range | 4 ~ 20 mA (current-type input requires external resistance, and finally measured by voltage) |
| Socket form | 2 x 3-pin 3.5 mm female socket |
| Signal definition | AI, AGND |

Serial Port

| | |
|--------------------|---|
| Type | 1 x RS232 + 1 x RS485 |
| Socket form | 2 x 4-pin 3.5 mm female socket |
| Signal definitions | RS232: RXD, TXD, SGND, RTS, CTS RS485: Data+ (A), Data- (B), GND |

Other Interfaces

- 1 x GPS interface (Optional, depending on cellular module)
- 1 x 480Mbps high-speed USB 2.0 interface (Type A, 5V, 500mA)

Others

| | |
|----------------|--|
| Reset button | 1 x RST |
| RTC | External RTC clock, Backup energy storage capacitor can be maintained for 2 days |
| LED indicators | 1 x RUN, 1 x MDM, 1 x USR, 1 x RSSI, 1 x Wi-Fi |
| Built-in | Watchdog, Timer |

Software (Basic features of RobustOS)

| | |
|-------------------|---|
| Network protocols | PPP, PPPoE, TCP, UDP, DHCP, ICMP, NAT, HTTP, HTTPS, DNS, ARP, NTP, SMTP, Telnet, VLAN, SSH2, DDNS, etc. |
| VPN tunnel | IPsec, OpenVPN, GRE |
| Firewall | DMZ, anti-DDoS, Filtering (IP/Domain name/MAC address), Port Mapping, Access Control |
| Remote management | Web, CLI, SMS |

App Center (Available Apps for RobustOS)

| | |
|-------|---|
| Apps* | L2TP, PPTP, DMVPN, VRRP, QoS, Captive Portal, WLAN Multi AP, SNMP, Language, RCMS |
|-------|---|

*Request on demand. For more Apps please visit www.robustel.com.

SDK

| | |
|--------------------------------|--------|
| Supported programming language | C, C++ |
| Flash available for SDK | 4 MB |
| RAM available for SDK | 64 MB |

Power Supply and Consumption

| | |
|-------------------|---|
| Connector | 2-pin 3.5 mm socket with lock |
| Input Voltage | 9 ~ 36 VDC |
| PoE-PD Voltage | Possibility to power up through ETH0 40 ~ 57 VDC |
| Power consumption | Idle: 250mA@12V; Data link: 890mA@(peak) 12V |

Physical Characteristics

| | |
|-----------------------|--|
| Ingress protection | IP30 |
| Housing & Weight | Plastic, 250 g |
| Dimensions | 105 x 90 x 46 mm |
| Installations | Desktop, wall mounting and 35 mm DIN rail mounting |
| Operating temperature | -25 ~ +70 °C |
| Storage temperature | -40 ~ +85 °C |
| Relative humidity | 5 ~ 95% RH |

Regulatory and Type Approvals

| | |
|---------------|---|
| Environmental | RoHS2.0, WEEE |
| EMI | EN 55032: 2012/AC: 2013 (CE & RE) Class B |
| EMS | IEC 61000-4-2 (ESD) Contact Level 2 IEC 61000-4-3 (RS) Level 2 IEC 61000-4-4 (EFT) Level 2 IEC 61000-4-5 (Surge) Level 2 IEC 61000-4-6 (CS) Level 2 IEC 61000-4-11 (DIP) Level 2 |

ORDERING INFORMATION

| Model | PN | GNSS | POE-PD | Frequency Bands* | Country/Region | Certifications (*In progress) |
|--------------|---------|------|--------|--|--------------------------|---|
| R1520-4L (V) | B056704 | ✓ | ✓ | 4G: LTE FDD: B1/B2/B3/B4/B5/B7/B8/B28; LTE TDD: B40 3G: WCDMA: B1/B2/B5/B8 2G: GSM: B2/B3/B5/B8 | Oceania, South America | RCM |
| | B056713 | ✓ | - | | | |
| | B056705 | ✓ | ✓ | 4G: LTE FDD: B1/B3/B8/B18/B19/B26; LTE TDD: B41 3G: WCDMA: B1/B6/B8/B19 | Japan | Telec, JATE |
| | B056714 | ✓ | - | | | |
| | B056708 | ✓ | ✓ | 4G: LTE FDD: B1/B2/B3/B4/B5/B7/B8/B12/B13/ B18/B19/B20/B25/B26/B28 LTE TDD: B38/B39/B40/B41 3G: WCDMA: B1/B2/B4/B5/B6/B8/B19 2G: GSM: B2/B3/B5/B8 | EMEA, North America, SEA | CE, E-Mark, FCC, IC, TRA, ICASA, UKCA,SIRIM |
| R1520-4L (S) | B056703 | - | ✓ | 4G: LTE FDD: B1/B3/B7/B8/B20/B28A 3G: WCDMA: B1/B8 2G: GSM: B3/B8 | EMEA, SEA | CE, UKCA, E-Mark |
| | B056712 | - | - | | | |

*For more information about 4G frequency bands in different countries, please contact your Robustel sales representative.